


Doppeltwirkender Hydraulikzylinder 250 bar

Baureihe: HZD3 // Bauform: F

Doppeltwirkende Hydraulikzylinder 250 bar Baureihe: HZD3 Bauform: F

Lage der Entlüftungen P5, P6 und der Anschlüsse P7, P8

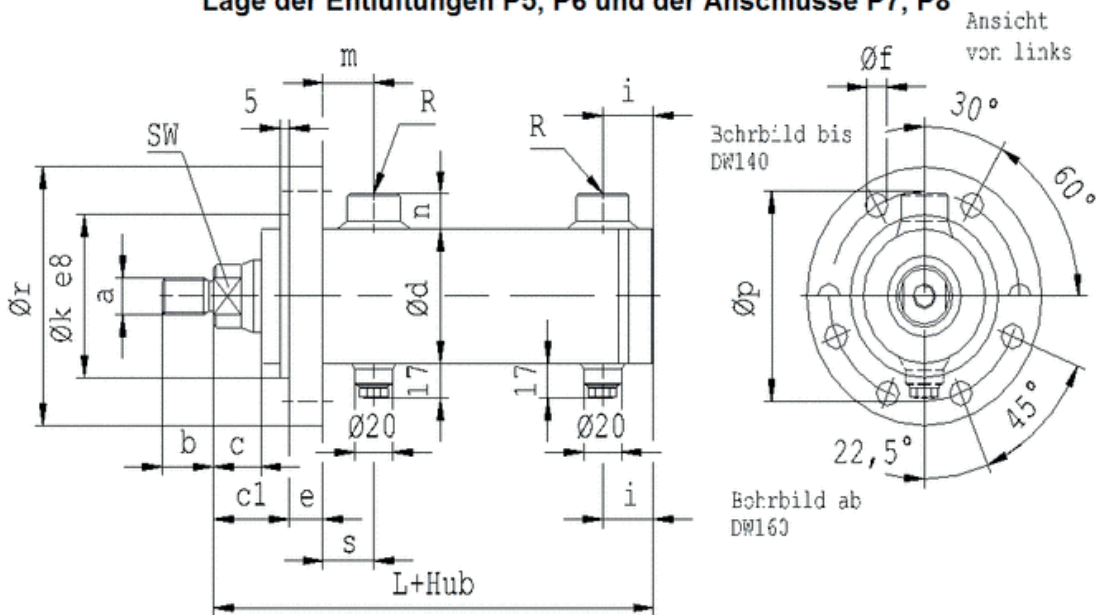

Ø Kolben	Ø Stange	L	e	c	n	Ød	m	s	i	Øk _{e8}	Ør	Øp	Øf	c1	SW	a	b	R
25	16	125	10	16	22	35	35	20	17	50	79	65	7	31	14	M14x1,5	14	R 1/4"
32	20	135	12	18	22	42	35	20	20	60	94	75	9	33	17	M16x1,5	16	R 3/8"
40	25 30	149	15	21	22	52	40	20	23	65	104	85	11	36	19 24	M16x1,5	16	R 3/8"
50	25 35	166	18	22	22	65	40	20	27	75	118	95	11	37	19 27	M22x1,5	22	R 1/2"
63	35 45	185	22	26	22	78	40	20	27	90	138	115	13	39	27 36	M28x1,5	28	R 1/2"
80	45 55	195	30	30	22	100	40	20	30	125	190	160	17	45	36 46	M35x1,5	35	R 1/2"
90	50 60	203	30	30	22	110	40	20	30	125	190	160	17	45	41 50	M35x1,5	35	R 1/2"
100	55 70	210	35	35	22	120	45	20	30	140	228	190	22	50	46 60	M45x1,5	45	R 1/2"
110	60 80	210	35	35	22	130	45	20	30	140	228	190	22	50	50 65	M45x1,5	45	R 1/2"
125	70 90	248	40	37	22	150	50	20	35	165	245	205	22	55	60 75	M58x1,5	58	R 1/2"
140	80 100	325	43	40	22	170	55	40	48	190	290	240	26	60	65 85	M65x1,5	65	R 3/4"
160	90 110	330	45	40	22	195	55	30	50	210	320	270	26	60	75 95	M65x1,5	65	R 3/4"
180	100 125	385	50	40	22	219	55	45	55	235	355	295	33	65	85 110	M80x2	80	R 3/4"
200	110 140	385	55	40	25	244	60	40	55	265	390	330	33	65	100 130	M80x2	80	R 1"