


Doppeltwirkender Hydraulikzylinder 250 bar

Baureihe: HZD3 // Bauform: H

Doppeltwirkende Hydraulikzylinder 250 bar Baureihe: HZD3 Bauform: H

Lage der Entlüftungen P5, P6 und der Anschlüsse P7, P8

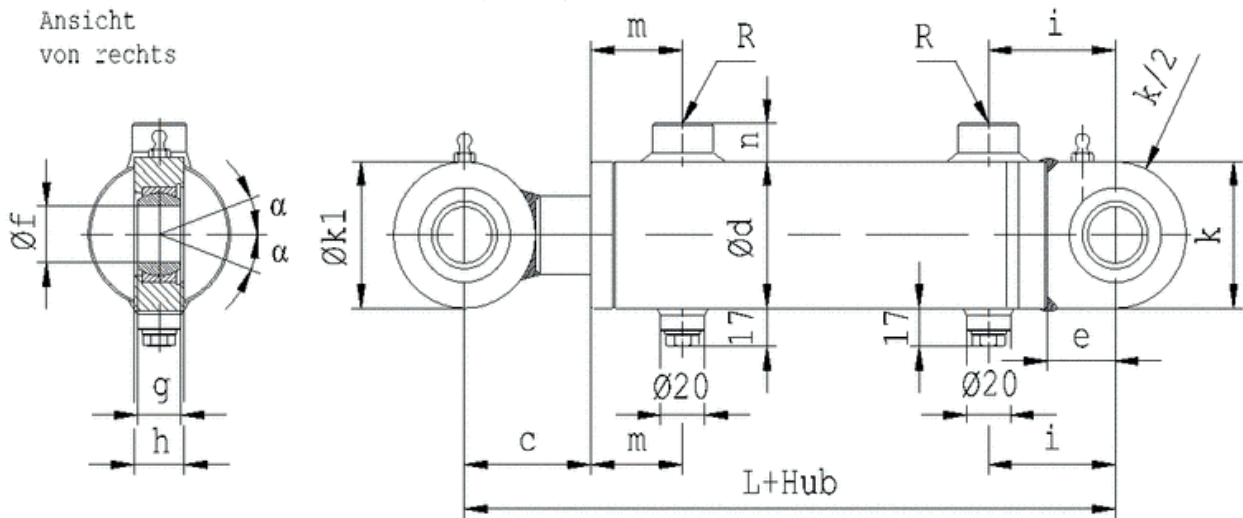

Ø Kolben	Ø Stange	L	e	c	n	Ød	m	i	Øk ₁	k	g	h	Øf	α Grad	R
25	16	150	25	36	22	35	42	42	40	40	12	10	15	8	R 1/4"
32	20	165	25	43	22	42	42	45	60	55	16	19	20	9	R 3/8"
40	25 30	180	31	51	22	52	41	54	68	65	20	23	25	7	R 3/8"
50	25 35	210	39	62	22	65	42	66	86	78	22	28	30	6	R 1/2"
63	35 45	235	45	66	22	78	55	72	92	90	25	32	35	6	R 1/2"
80	45 55	265	50	80	22	100	56	80	106	100	28	35	40	7	R 1/2"
90	50 60	265	50	72	22	110	65	80	106	100	28	35	40	7	R 1/2"
100	55 70	295	60	90	22	120	65	90	128	116	35	40	50	6	R 1/2"
110	60 80	295	60	90	22	130	65	90	128	116	35	40	50	6	R 1/2"
125	70 90	355	75	102	22	150	80	110	152	150	44	50	60	6	R 1/2"
140	80 100	420	80	115	22	170	105	128	170	165	49	55	70	6	R 3/4"
160	90 110	420	80	110	22	195	105	130	170	165	49	55	70	6	R 3/4"
180	100 125	500	90	125	22	219	130	145	200	200	55	60	80	6	R 3/4"
200	110 140	500	90	125	25	244	130	145	200	200	55	60	80	6	R 1"