


Doppeltwirkender Hydraulikzylinder 250 bar

Baureihe: HZD5 Industrieausführung
Kolbern $\geq 200\text{mm}$

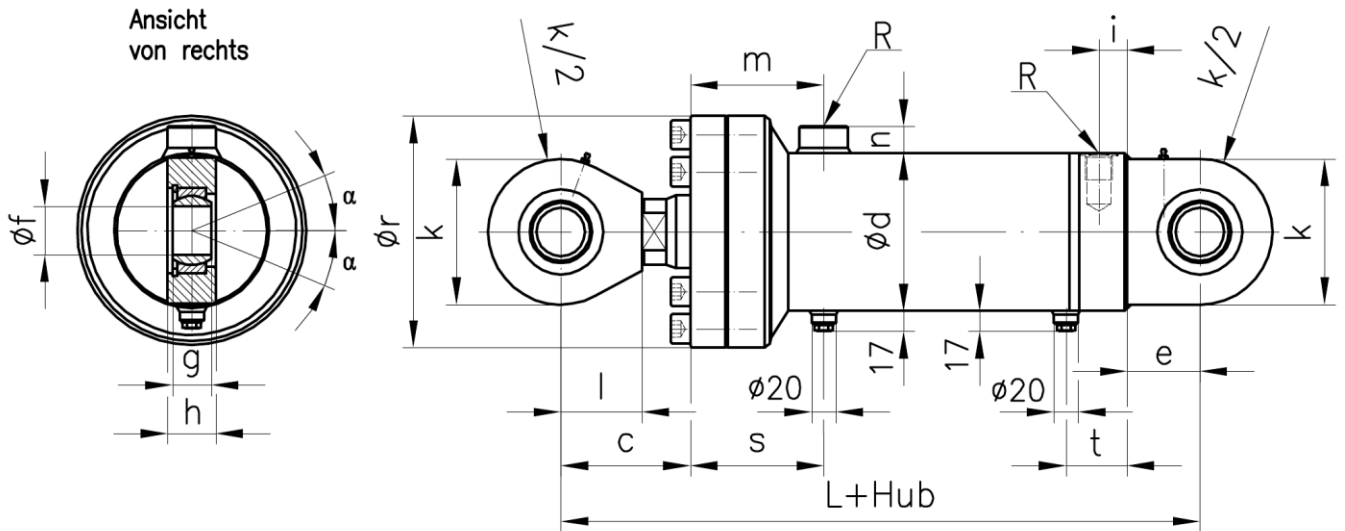

Lage der Entlüftungen P5/P6 und der Anschlüsse P7/P8

Ø Kolben	Ø Stange	L	e	c	n	Ød	Ør	m	i	k	s	t	g	h	Øf	l	a Grad	R
220	125	610	115	147	35	273	310	150	28	210	135	50	65	88	90	115	5	G1¼"
250	140	660	140	175	35	298	340	150	32	270	135	50	70	98	100	140	7	G1½"
280	160	710	150	195	45	343	390	165	32	300	150	50	70	108	110	150	6	G1½"
300	160	750	165	220	55	368	410	165	32	320	150	50	85	118	120	165	6	G1½"
320	180	820	165	235	55	406	430	165	32	350	150	50	90	128	140	180	7	G1½"