


## Double-Action Damping Cylinders 210 bar

### Series: HZD4 // Model: A

**Double-Action Damping Cylinders - 210 bar**      **Series: HZD4 Model: A**  
 Position of the P5 and P6 vents and the P7 and P8 connections

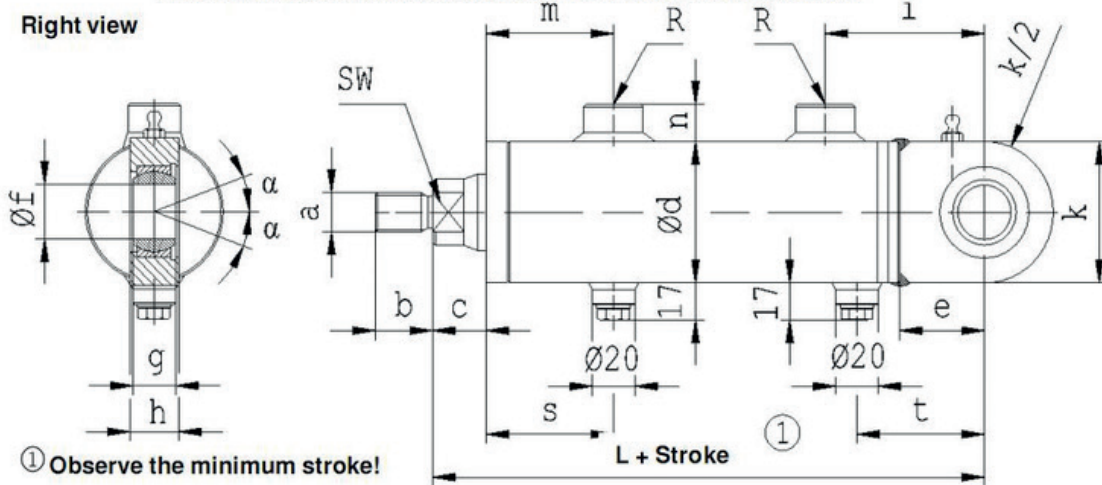

Piston Ø	Rod Ø	L	Min. str.	e	c	n	Ød	m	i	s	t	k	g	h	Øf	SW	a	b	α deg	R
<b>40</b>	<b>25</b>	221	45	31	21	22	52	85	84	41	54	65	20	23	25	19	M16x1.5	16	7	R 3/8"
<b>50</b>	<b>35</b>	254	50	39	22	22	65	85	101	42	66	78	22	28	30	27	M22x1.5	22	6	R 3/8"
<b>63</b>	<b>45</b>	297	55	45	26	22	78	96	117	55	72	88	25	32	35	36	M28x1.5	28	6	R 3/8"
<b>80</b>	<b>50</b>	311	60	50	30	22	100	111	122	56	80	100	28	35	40	41	M35x1.5	35	7	R 1/2"
<b>100</b>	<b>70</b>	346	65	60	35	22	120	126	137	65	90	120	35	40	50	60	M45x1.5	45	6	R 3/4"
<b>125</b>	<b>90</b>	400	70	75	37	22	150	145	166	80	110	150	44	50	60	75	M58x1.5	58	6	R 3/4"